

# K4.2

## SINGLE SHUT-OFF MANIFOLD

- K4.2 is a compact distribution manifold
- Main shut-off
- With flush-mounting and accessible Sandwich box
- The FASTEC® connection is convenient and safe to work with
- The compact faceplates allow access to the shut-off valves
- The faceplate Design is suitable for exposed installation
- TOP-ENTRY® removable shut-off unit with Soft Turn® full-flow anti-jamming balls



Material			
Body	Sandwich Box	Balls	Handle
Brass CW617	ABS	Silicone	Polyamide




### TECHNICAL SPECIFICATIONS

Connections	Working pressure	Temperature	Standard and certification
FASTEC®	PN10 (10 bar)	0°C + 95 °C	DIN EN 13828 - DVGW W570-1

### VERSIONS AND CODES

Single shut-off manifold for domestic water systems \*

**B03** Compatible faceplate

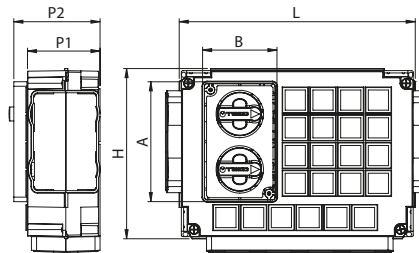

Code	DN	D1	M	L	H	P1	P2	A	B	Faceplate	Pack
<b>F</b> K402BF10100	10	F13	32	234	170	72	85	119	74	B03	5

\* Includes: fixing brackets, site protection cover. Does not include: faceplate and fittings.



The shut-off devices USE FASTEC® STORE FITTINGS.

TECO Srl


Via Sandro Pertini, 39/41 - Zona industriale Noccole, 25050 Provaglio d'Iseo (BS)

+39 030 6850510 | +39 030 6850555  
info@tecosrl.it | www.tecosrl.it



## FACEPLATES

B03



Code		Finish	Pack
KPLB0301600		White	10
KPLB0301M00		Polished chrome	5
KPLB0301800		Silver	5
KPLB0301A00		Black	5
KPLB0301700		Copper	5


## FUNCTION AND TECHNOLOGIES





### TWIN 1 FITTING

Fastec® Twin fittings make it possible to increase the number of connections. In this way you can simplify complex system solutions.


COD. KA00F10001



## INSTALLATION POSITION

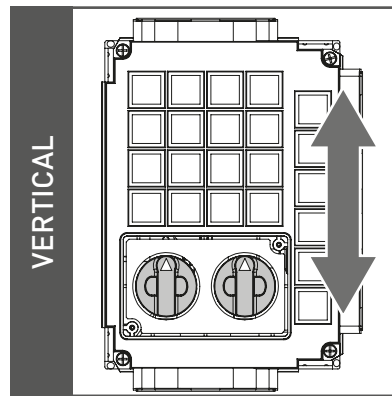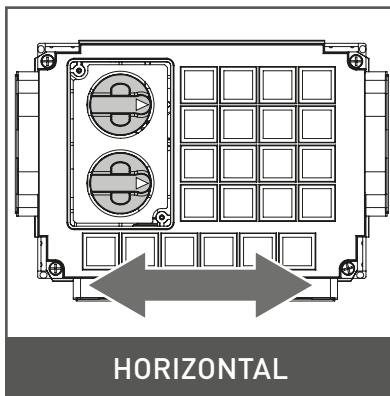

## TECO-CONTROL

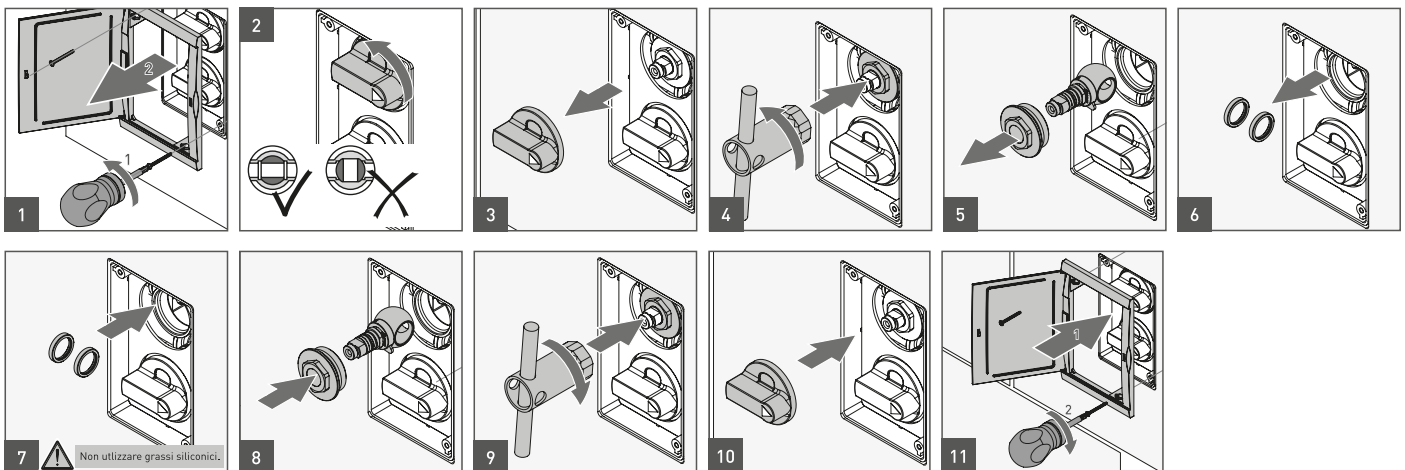

TECO Srl  
Via Sandro Pertini, 39/41 - Zona industriale Noccole, 25050 Provaglio d'Iseo (BS)

+39 030 6850510 | +39 030 6850555  
info@tecosrl.it | www.tecosrl.it




## FASTEC ACCESSORIES

### TWIN 1 fitting




FASTEC® TWIN fitting




	Code	D1	D2	Pack
F	KA00F10001	F13M	2xF13F	10

## ACCESSORIES

### Modular extension kit





Extension -23mm- modular + screws + faceplate extensions

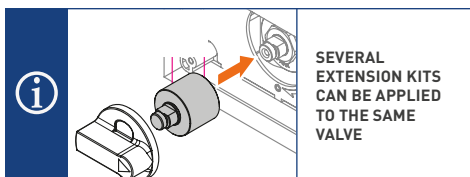

Code	Pack
KPR0001	1

### Maintenance frame




Code	DN	Pack
KRPL0004	150x100x20 mm	1

## SPARE PARTS

### TECO-control kit




TECO-CONTROL spare parts kit



Code	DN	Pack
KR00K00001	15	1


### Handle kit



2 BLUE (TOP + BOTTOM) 1 RED

Code	Colour	Pack
KA00K40001	BLUE / RED	1

## FLOW LOSS DIAGRAM

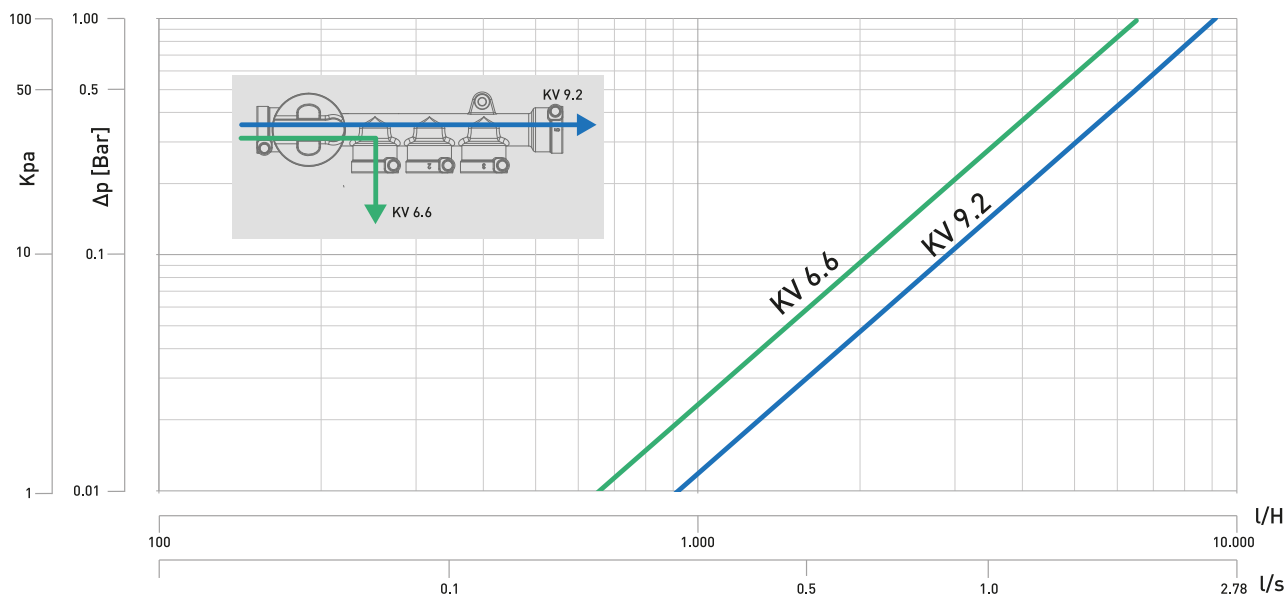

## ITEM SPECIFICATIONS

### K4.2: Single Shut-off Manifold with 5+4 outlets

Compact pre-assembled distribution manifold kit with 5+4 outlets or 4+3 outlets, brass body with Top Entry removable hot/cold shut-off valves in accordance with the EN 13828 standard, with "soft turn" seals and PPSU full-flow balls. Quick coupling fittings with FASTEC F13 technology and locking pin. Easily accessible sandwich box made of impact-resistant PS, with depth adjustment brackets and plaster protection cover.

Opens and closes by turning the handles by 90°, manually openable faceplate available in five colours.

Maximum temperature (peak) 95°C.

Maximum working temperature 70°C.

Maximum pressure 10 bar.

